

ADS7700 Mini Armor Dome



Specifications:

Image Sensor	1/3 Sony Super HAD CCD
Sync System	Internal
Resolution	560 TV Lines
Power Supply	12 Volts DC
Shutter speed	NTSC: 1/60 ~ 1/100,000s
Auto gain control	Yes
Black light compensa-tion	Automatic
Operational Temp.	-20° to 60° C



MC-R05 Camera



Specifications:


Image Sensor	1/3 CCD image sensor
Sync System	Internal
Horizontal Resolution	420 TV Lines
Power Supply	12 Volts DC / 150mA
Picture Element	NTSC: 510x492
Auto gain control	Yes
Power Consumption	170mA
Weight	0.28kg

Features:

- ◆ Weatherproof housing for outdoor use
- ◆ Capable for day and night monitoring

MDCR-120

Triplex MPEG4 4CH Car DVR

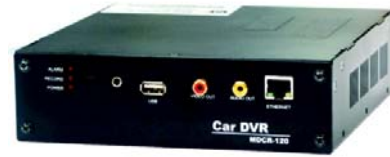

FEATURES:

- ◆ Triplex, MPEG4 Encoding/Decoding
- ◆ USB AVI file Back-up
- ◆ Police car, Ambulance, Buses
- ◆ PTZ/Present Control: RS-485
- ◆ Video Input / Output:4ch/RCA out
- ◆ Audio Input / Output: 4ch / 1ch out
- ◆ Sensor / Alarm: 2 Input / 1 Output
- ◆ Display speed:120/100 fps
- ◆ Recording speed: 120/100 fps

SPECIFICATIONS:

Back up files: AVI, JPG, BMP

Playback: single & quad pictures

Video standard: NTSC/PAL

Secondary Storage: USB 1.1 memory

Hard disk capacity: Unlimited within 1 x HDD (2.5inch Notebook HDD)

Activity detection:12x12 grid, Sensitivity levels:10

Remote Access: Internet Explorer or Remote Viewer

Record Scheduling: Daily, Weekly adjust specific Hr per

EC656 CEILING MOUNT CAMERA

FEATURES:

- ◆ 100% waterproof, rustproof diecast housing
- ◆ Vibration resistance (10G) for Vehicle appli-

SPECIFICATIONS:

Image Sensor	1/3 Sony Super HAD CCD
Scanning Sys.	NTSC 535 lines / PAL 625 Lines / 2:1 Interlaced
Sync. System	Internal
Resolution	380 TV Lines
Power Supply	12 Volts DC
Field of View	90 degrees
Operational	-22F to ~140F



www.midlandtelecom.com

3239 West 2nd Street
P.O. Box 2151
Grand Island, NE 68802

Phone:(308) 381-4000
Toll Free: (800) 658-0567
Fax: (308) 381-2801